

## Ringo Star-GX

Pendant luminaire - Direct light distribution

Article code: RGXLSL-830H-D1245-KA



Illustrations may only be similar and serve as an orientation.

Ringo Star-GX. LED. Pendant luminaire. Luminaire body made of aluminium profile with 40mm profile width. Surface finish Radiant Silver. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre for wide and symmetrical light distribution. High glare limitation, compatible for office applications. UGR<=19. Reflector: Satin Silver. Dimmable DALI. DxHxW (round). D=1245mm. W=40mm. H=65mm. Cord suspension for parallel installation with power supply cable and ceiling



rose (Set). Pendant length max 4000mm. Power supply: transparent. Ceiling rose: Matching luminaire's surface colour. High-power current. 10724lm. 90W. 9,4kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

# lightnet

## Ringo Star-GX

Pendant luminaire - Direct light distribution

Article code: RGXLSL-830H-D1245-KA

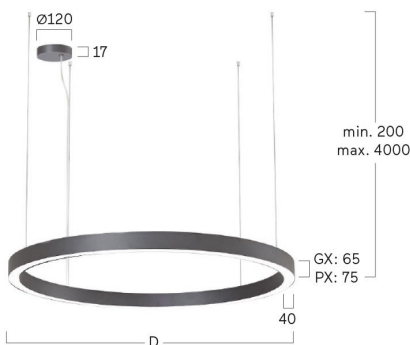

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

|                              |   |
|------------------------------|---|
| Productname                  | Ringo Star-GX                                     |
| Lamp                         | LED   |
| Installation Type            | Pendant luminaire                                 |
| Surface finish               | Radiant Silver                                    |
| Light characteristics        | Direct light distribution                         |
| Colour temperature           | 3000K   |
| Colour Rendering Index (CRI) | CRI>80  |
| Optical system               | Lens Louvre                                       |
| Reflector Colour Inside      | Reflector: Satin Silver                           |
| Control                      | Dimmable (DALI)                                   |
| Length L/Diameter D (mm)     | D=1245mm  |
| Width W (mm)                 | W=40mm  |
| Height H (mm)                | H=65mm  |
| Current/Power                | High-Power  |
| Luminous Flux                | 10724lm   |
| Power consumption            | 90W   |
| Suspension                   | Parallel susp. (Set)                              |
| Ceiling rose colour          | Ceiling rose: Matching luminaire`s surface colour |
| Pendant length (mm)          | Pendant length max 4000mm                         |
| Degree of protection         | IP20  |
| Cable Colour                 | Power supply: transparent                         |
| LED lifetime                 | L80B10 (tq 25°C) = 50.000h                        |
| UGR                          | UGR<=19   |
| Photometric code             | 8 30 / 3 3 9                                      |
| Photobiological class        | RG0 (EN62471)                                     |
| Indoor/Outdoor               | Indoor: ta [ambient] max. 25°C                    |
| Weight (kg)                  | 9,4kg   |

