


# LK-L 060.10830.1685.U16/DALI


Lichtkanal 060 | Light-Insert (Batwing/Wide Beam nanoOptix, 1xLED 18W 830/3000K 2480lm)

— C0/C180    cd / 1000 lm    - - - C90/C270

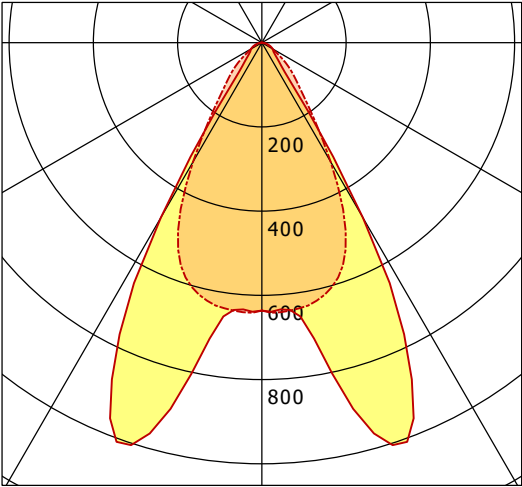

|              | C0  | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0°           | 636 | 636 | 636  | 636  |
| 15°          | 934 | 611 | 934  | 611  |
| 30°          | 479 | 327 | 479  | 327  |
| 45°          | 50  | 104 | 50   | 104  |
| 60°          | 30  | 28  | 30   | 28   |
| 75°          | 14  | 9   | 14   | 9    |
| 90°          | 0   | 0   | 0    | 0    |
| cd / 1000 lm |     |     |      |      |

Offset [m]    Cone width [m]    Illuminance [lx]

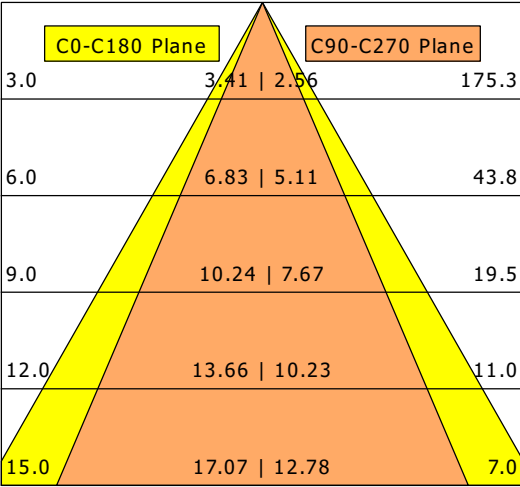

|                    |  |                  |
|--------------------|--|------------------|
| <b>η</b>           |  | LED              |
| Efficiency         |  | 138 lm/W         |
| Direct/Indirect    |  | ↓ 100% / ↑ 0%    |
| System Power       |  | 18 W             |
| <b>UGR</b>         |  | X=4H, Y=8H       |
| Reflection factors |  | 70/50/20         |
| UGR C0/C180        |  | 14.2             |
| UGR C90/C270       |  | 16.1             |
| CIE Flux Codes     |  | 86 97 99 100 100 |
| Ra/CRI             |  | > 80             |