


Art. no. 872138

Power supply unit (CV, DC) dimmable IP, DIM CV, 24 V
66-200 W

 **DEKOLIGHT**

IP

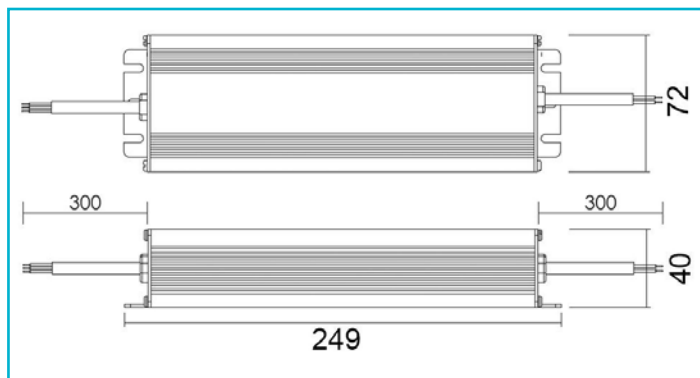

Special features

- Can be dimmed using leading-edge/trailing-edge phase dimmers
- Compact design
- Short-circuit-proof, overload protection, overheating protection
- Flicker-free
- Robust housing

Housing Material	Aluminium
Housing Color	Silver
Operating Mode	Constant voltage
Protection Class	Protection class I/protective grounding
Power	66.0-200 W
Output Voltage	24 V/DC
Output Current	2700-8300 mA
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Number of Channels	1
Power Factor	0.95
Connection Type	Open cables
Primary Connection	With free strand / conductor ends
Secondary Connection	Open cables
Number of Circuit Breaker B10A max.	3
Number of Circuit Breaker B16A max.	7
Number of Circuit Breaker C10A max.	3
Number of Circuit Breaker C16A max.	7
Inrush Current max.	45 A / 100 μ s
Capacitive Load	148.64 nF
Reference Point Tc	80 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 50 °C
IP Protection Class	IP 67
Length	249 mm
Width	72 mm
Height	40 mm
Product weight	1262 g

