lightnet

Ringo Star-G3

Pendant luminaire - Direct light distribution



Illustrations may only be similar and serve as an orientation.

Ringo Star-G3. LED. Pendant luminaire. Luminaire body made of aluminium profile with 60mm track width. Surface finish Radiant Silver. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Dimmable DALI. DxHxW (round). D=600mm. W=60mm. H=85mm. Central cord suspension with ceiling rose and power supply cable (Set). Pendant length max 4000mm. Power supply: transparent. Ceiling rose: Matching luminaire's surface colour. Highpower current. 4300lm. 53W. 6kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.


Article code: RG3OSL-840H-D600-U



lightnet

Ringo Star-G3

Pendant luminaire - Direct light distribution

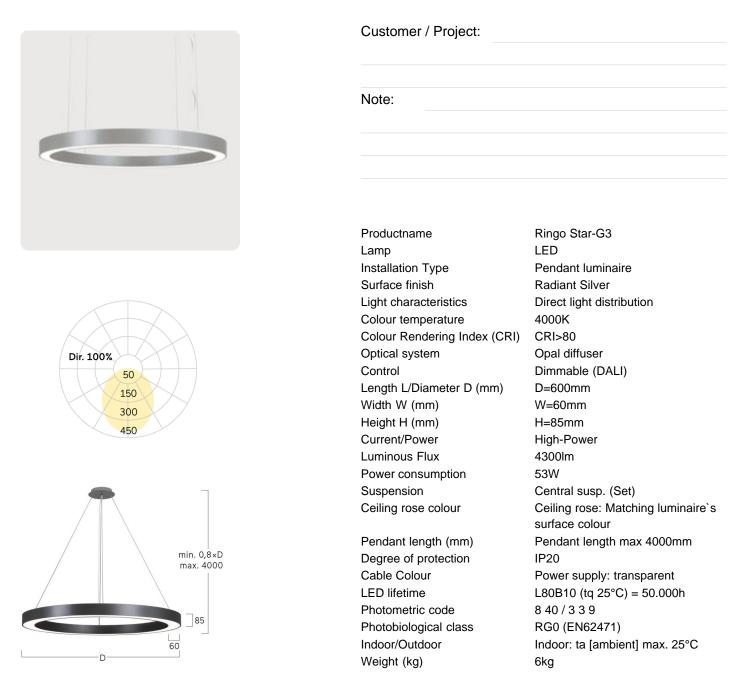

Article code: RG3OSL-840H-D600-U