


Art. no. 126074

Downlight Swing round, Tilt, 1x max 50 W MR16, Aluminium

 DEKOLIGHT

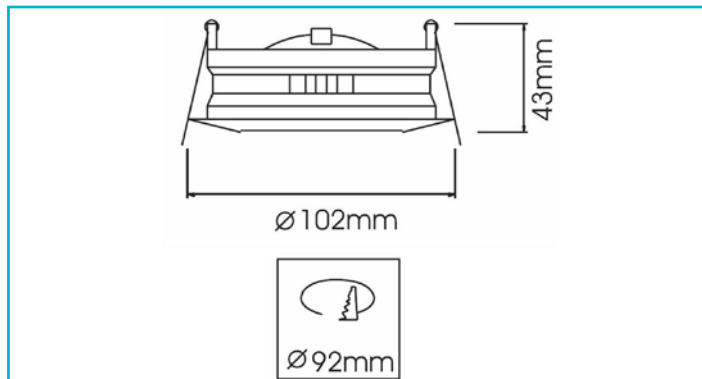

Housing Material	Die-cast aluminium
Housing Color	Aluminum
Housing Surface	Matt
Protection Class	Protection class III/safety extra-low voltage
Operating Mode	Constant voltage
max. Power	1x max. 50 W
Rated Input Voltage	12 V/AC/DC
Socket Description	GU5.3 / MR16
Socket Quantity	1
Power Supply Unit incl.	No
Connection Cable Secondary	Yes
Secondary Connection	Open cables
Dimmable	Yes
Control technology	Dimmable via optional light source
Motion Detector	No
Execution	Without lamp
Swivel Angle	40 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below
Diameter	102 mm
Installation Depth	65 mm
Cut Out Diameter	92 mm
Product weight	158 g
Working Temperature	-5 to 40 °C
IP Protection Class	IP 20