


LUNXS 300.840.1/DALI


Lunata XSmall (1xLED 11W 840/4000K 1130lm)

— C0/C180 cd / 1000 lm - - - C90/C270

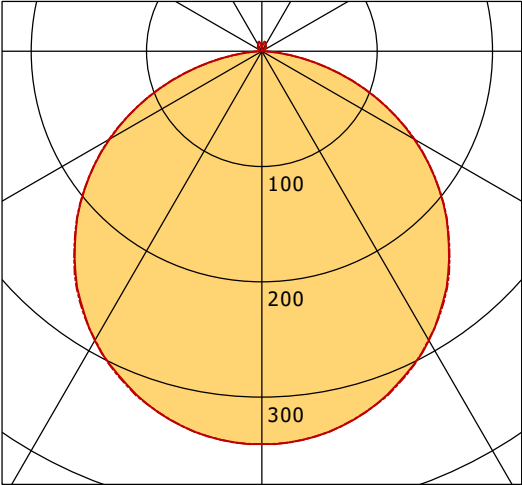

	C0	C90	C180	C270
0°	341	341	341	341
15°	328	327	328	327
30°	290	289	290	289
45°	229	229	229	229
60°	152	153	152	153
75°	64	64	64	64
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

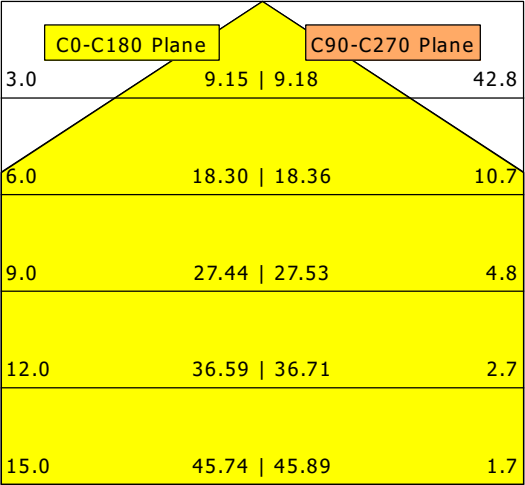

η	LED
Efficiency	103 lm/W
Direct/Indirect	↓ 98% / ↑ 2%
System Power	11 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.1
UGR C90/C270	20.1
CIE Flux Codes	47 79 96 98 100
Ra/CRI	> 80