


Article no. 1725 1000

Light.
For Generations.

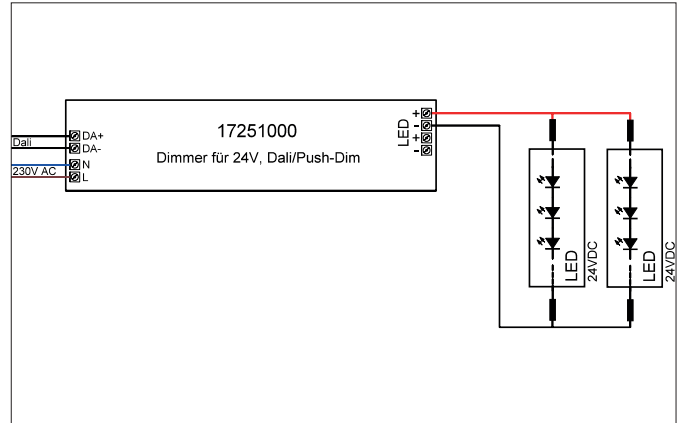

Tender
LED power supply. Ceiling cut-out Installation depth mm, Length 290 mm, Width 45 mm, Weight 0,297 kg, ,with max: 80 W , Delivery without bulb.Housing material: Plastic, Colour: White, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20, .For connection to an external driver, which is not included in the scope of delivery of the luminaire. DALI-2/PUSH dimmable.

Product Benefits

- Plastic housing incl. strain relief
- protection class II
- dimmable via DALI-2
- Measuring point Tc (max) 85°C

Article data	
Article no.	17251000
GTIN	4251433955245
Material	Plastic
Colour	White
Length	290 mm
Width	45 mm
Hight	31 mm
Weight	0.297 kg

Article no. 1725 1000

Light.
For Generations.

Operating technology of driver	
AC nominal voltage min	220 V
AC nominal voltage max	240 V
Frequenz max.	50 Hz
DC nominal voltage min	176 V
DC nominal voltage max	264 V
Protection class	II
Degree of protection	IP20
Starting current	50A Max./300 μ s@230V, Full Load
Power min	1 W
Power	80 W
Control	DALI-2/PUSH
Power factor	0.95

Packing data	
Gross weight	0.337 kg
Length of packaging	330 mm
Packaging width	50 mm
Packaging height	37 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>