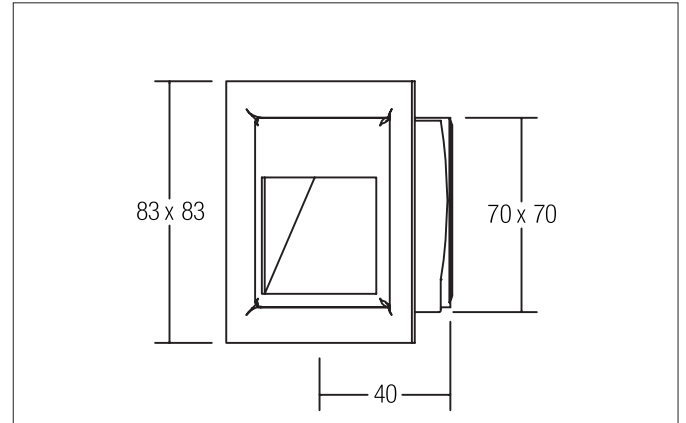


VERTU LED wall recessed light

Article no. P3729W

Light.
For Generations.**Tender**

LED wall recessed light, Square. Ceiling cut-out L x W 70 x 70 mm, Installation depth 40 mm, Weight 0,167 kg, asymmetric optimal light distribution due to a Without cover cover. Luminous flux 60 lm, Power 1 x 1,2 W, Light colour , Correlated color temperature (CCT) 6.500 K, Colour rendering index CRI > 80, Housing material: Steel, Colour: Alu, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): III, Degree of protection (DIN EN 60529): IP20, .For connection to an external driver, which is not included in the scope of delivery of the luminaire. Depending on driver dimmable.

| Article data | |
|--------------------|-------------------------|
| Article no. | P3729W |
| GTIN | 4250047729907 |
| Series name | VERTU |
| Short description | LED wall recessed light |
| Material | Steel |
| Colour | Alu |
| Type of surface | Matt |
| Shape | Square |
| Built-in width | 70 mm |
| Built-in length | 70 mm |
| Installation depth | 40 mm |
| Width | 83 mm |
| Hight | 83 mm |
| Weight | 0.167 kg |

VERTU LED wall recessed light

Article no. P3729W

Light.
For Generations.

| Lighting technology | |
|---------------------|------------|
| Colour temperature | 6.500 K |
| Light colour | White |
| Luminous flux | 60 lm |
| System efficiency | 50 lm/W |
| Colour rendering | CRI > 80 |
| Reflector | Glossy |
| Light sharing | Asymmetric |

| Operating technology of the luminaire | |
|---------------------------------------|--|
| System output | 1.2 W |
| Voltage type | DC |
| Current | 350 mA |
| Lamp | LED |
| Lamp holder | Plug&Play |
| Protection class | III |
| Degree of protection | IP20 |
| Dimmable | Depending on type of control gear |
| Control | Depending on driver |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Mounting technology | |
|-----------------------|---|
| Mounting method | Recessed mounting |
| Place of installation | Wall-mounted |
| Adjustability | Not adjustable |
| Further references | No cover with thermal insulation material |
| Material cover | Without cover |

| Packing data | |
|-------------------------|---|
| Gross weight | 0.182 kg |
| Length of packaging | 85 mm |
| Packaging width | 43 mm |
| Packaging height | 84 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |

VERTU LED wall recessed light

Article no. P3729W

Light.
For Generations.

| Accessories | |
|---|--|
|  | Article no.: 3702 LED plaster housing to P3729.. |
|  | Article no.: 17666000 LED converter 350 mA, on/off switchable Power: 1 - 5 W Dimensions: 52 mm x 30 mm x 23 mm |
|  | Article no.: 17662020 LED converter 350 mA, on/off switchable Power: 1 - 7,2 W Dimensions: 68 mm x 35 mm x 21 mm |
|  | Article no.: 17613000 LED converter 350 mA, on/off switchable Power: 1 - 15 W Dimensions: 115 mm x 34 mm x 19 mm |
|  | Article no.: 17621020 LED converter 350 mA, on/off switchable Power: 1 - 21 W Dimensions: 128 mm x 50 mm x 13 mm |
|  | Article no.: 17648020 LED converter 350 mA, trailing-edge phase dimmable Power: 0,7 - 17 W Dimensions: 166 mm x 46 mm x 34 mm |