


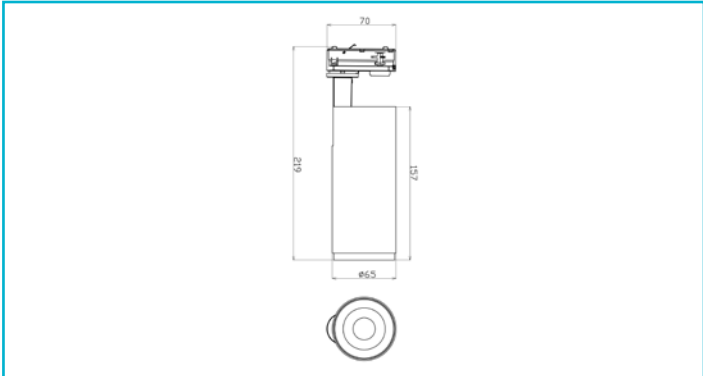

Housing Material	Aluminium	IP Protection Class	IP 20
Housing Color	Black	Life Time L70 / B50	50000 h
Material of Lens	PMMA	Switching Cycles	100000
Protection Class	Protection class I/protective grounding	Power Consumption	6 kWh/1000h
Rated Input	6 W	Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class E.
Rated Input Voltage Frequency	200-240 V/AC 50 / 60 Hz		
Power Supply Unit incl.	Yes		
Connection Type	Adapter		
Dimmable	Yes		
Control technology	Leading-edge dimmer, Trailing-edge dimmer		
Motion Detector	No		
Light Source	LED, Light source changeable TC		
Lightcolor	Warm white (WW)		
Color Temperature	2700 K		
Colour Rendering Index (Ra)	90		
Rated Luminous Flux	800 lm		
Luminous Efficiency	133.3 lm/W		
Rated Angle of Reflection	36 Degree		
Swivel Angle	90 Degree		
Rotation Angle	350 Degree		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		
Height	157 mm		
Diameter	65 mm		
Product weight	434 g		
Working Temperature	-20 to 40 °C		
Storage Temperature	-20 to 65 °C		