
Surface-mounted ceiling light Ascella, 30 W, 3000 K, Grey







Especially when it comes to lighting house entrances, patios or other access paths, spotlights specially designed for outdoors are the way to go. The protection classes required for such are part and parcel and different colours and shapes are options. Universal use and not to be overlooked as a security product.

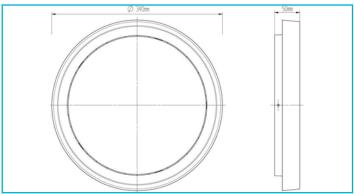

Special features

Base H x dia.: 12 x 270 mm

Housing Material Die-cast aluminium

Housing Color Grey
Material of Lens Plastic

Protection Class Protection class I/protective

grounding

Rated Input 30 W

Rated Input Voltage Frequency 220-240 V/AC 50 / 60 Hz

Power Supply Unit incl.YesConnection TypeClampDimmableNoMotion DetectorNo

Light Source LED, Light source not changeable

Color Temperature3000 KColour Consistency6 SDCMColour Rendering Index (Ra)80Rated Luminous Flux2300 lmRated Angle of Reflection113 Degree

Distribution Characteristic 120° DLS

Light Exit Surfaces1Light characteristicsDirectLight directionBelow

 Height
 50 mm

 Diameter
 340 mm

 Base height
 12 mm

 Base diameter
 270 mm

Working Temperature -5 to 40 °C
Storage Temperature -10 to 60 °C
IP Protection Class IP 54

Life Time L70 / B50 30000 h

Switching Cycles100000Power Consumption33 kWh/1000hEnergy Efficiency ClassG

