


OPT-P 110.840.1/DALI

Optico | Pendant (1xLED 89W 840/4000K 10860lm)

— C0/C180 cd / 1000 lm - - - C90/C270

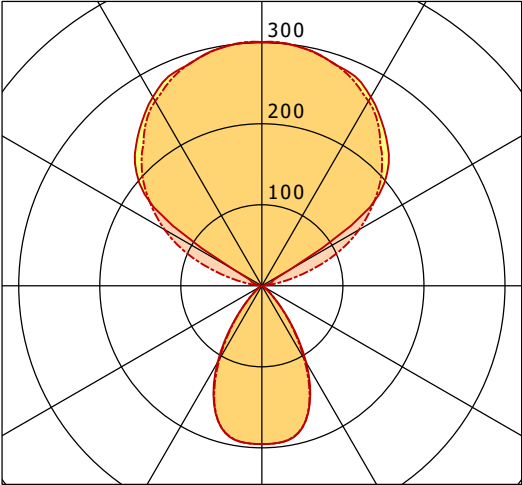

	C0	C90	C180	C270
0°	195	195	195	195
30°	109	105	109	105
60°	4	4	4	4
90°	0	1	0	1
120°	41	138	41	138
150°	269	263	269	263
180°	301	301	301	301
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	122 lm/W
Direct/Indirect	↓ 21% / ↑ 79%
System Power	89 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	<10.0
UGR C90/C270	<10.0
CIE Flux Codes	89 99 100 21 100
Ra/CRI	>80