



FLIR 200.2030.50

Flix 200 Round (FLIRZ 200.05, 1xLED 27W 830/3000K 2880lm 50 °)

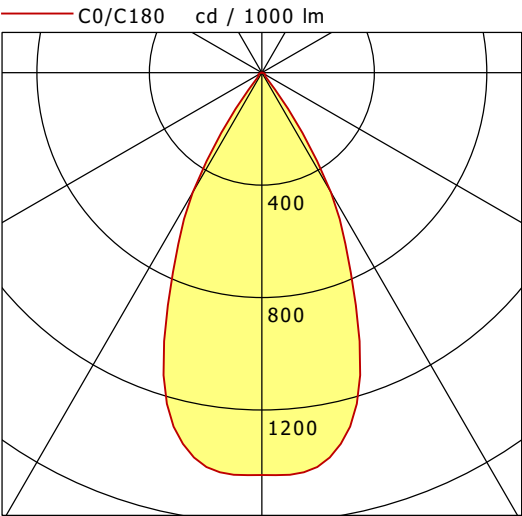

	C0	C90	C180	C270
0°	1431	1431	1431	1431
15°	1264	1264	1264	1264
30°	492	492	492	492
45°	17	17	17	17
60°	14	14	14	14
75°	6	6	6	6
90°	0	0	0	0
cd / 1000 lm				

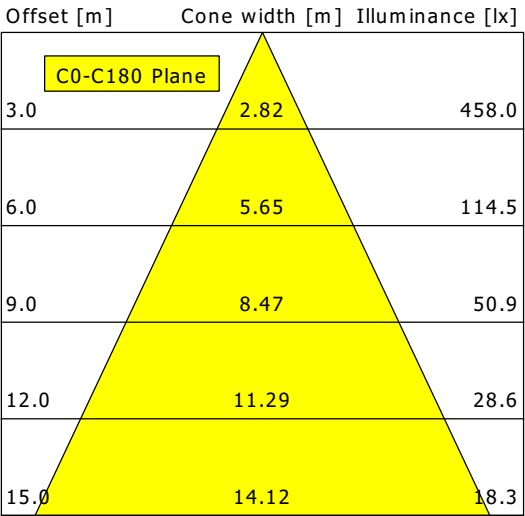

η		LED
Efficiency		107 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		27 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		21.4
UGR C90/C270		21.4
CIE Flux Codes	95 98 100 100 100	
Ra/CRI		>80