

Ringo Star-A5

Surface mounted luminaire - Direct light distribution

Article code: RA5LWE-840E-D270-B-BP



Illustrations may only be similar and serve as an orientation.



Ringo Star-A5. LED. Surface mounted luminaire for walls or ceilings. Luminaire body made of aluminium profile with 40mm profile width. Surface finish Snow White. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre for wide and symmetrical light distribution. High glare limitation, compatible for office applications. UGR<=19. Reflector: Jet Black. Blind Plate.

Switchable. DxHxW (round). D=270mm. W=40mm. H=40mm. Low-power current. 1860lm. 15W. 2kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,2%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L90B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

Ringo Star-A5

Surface mounted luminaire - Direct light distribution

Article code: RA5LWE-840E-D270-B-BP

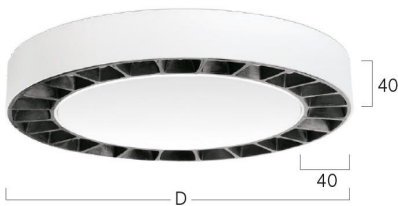

Customer / Project: _____

Note: _____

Productname	Ringo Star-A5
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Snow White
Light characteristics	Direct light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Lens Louvre
Reflector Colour Inside	Reflector: Jet Black
Central Module	Blind Plate
Control	Switchable
Length L/Diameter D (mm)	D=270mm
Width W (mm)	W=40mm
Height H (mm)	H=40mm
Current/Power	Low-Power
Luminous Flux	1860lm
Power consumption	15W
Degree of protection	IP20
LED lifetime	L90B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	2kg

