
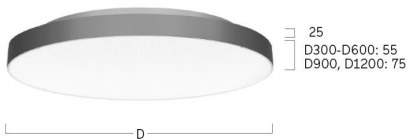


Basic-X1

Surface mounted luminaire - Direct/indirect light distribution

Article code: BX1ASL-840M-D500

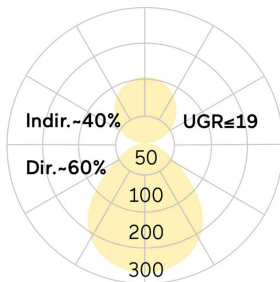

Customer / Project: _____

Note: _____

Productname	Basic-X1
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Radiant Silver
Light characteristics	Direct/indirect light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Dimmable (DALI)
Length L/Diameter D (mm)	D=500mm
Height H (mm)	H=55+25mm
Current/Power	Medium-Power
Luminous Flux	7760lm
Power consumption	51W
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR≤ 19
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	5,4kg

