



Connector Location A

Connector Location B

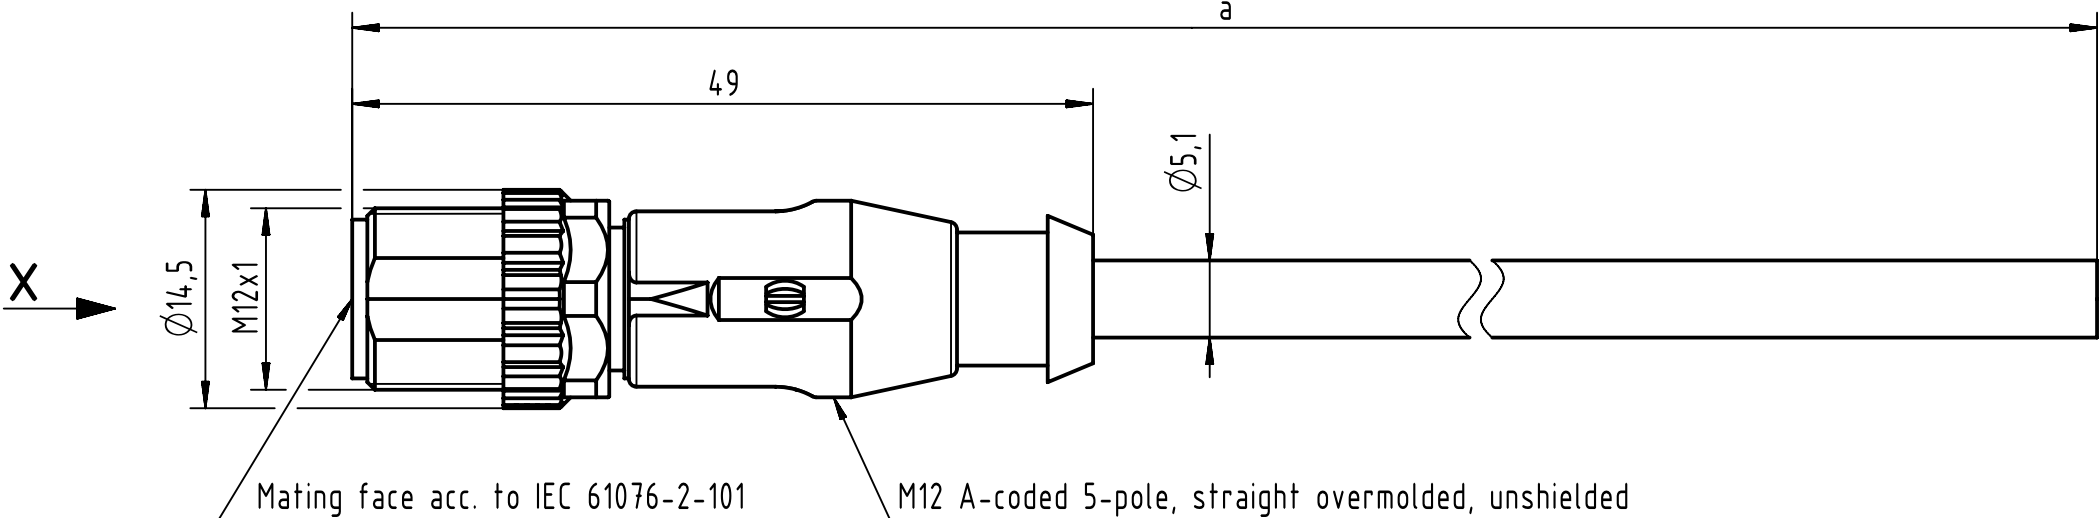


X
male

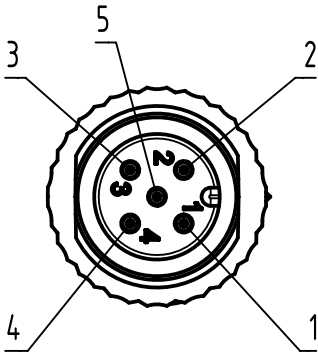

1	brown
2	white
3	blue
4	black
5	green/yellow

- Protection level: IP67
- Temperature range: -25°C ... +80°C

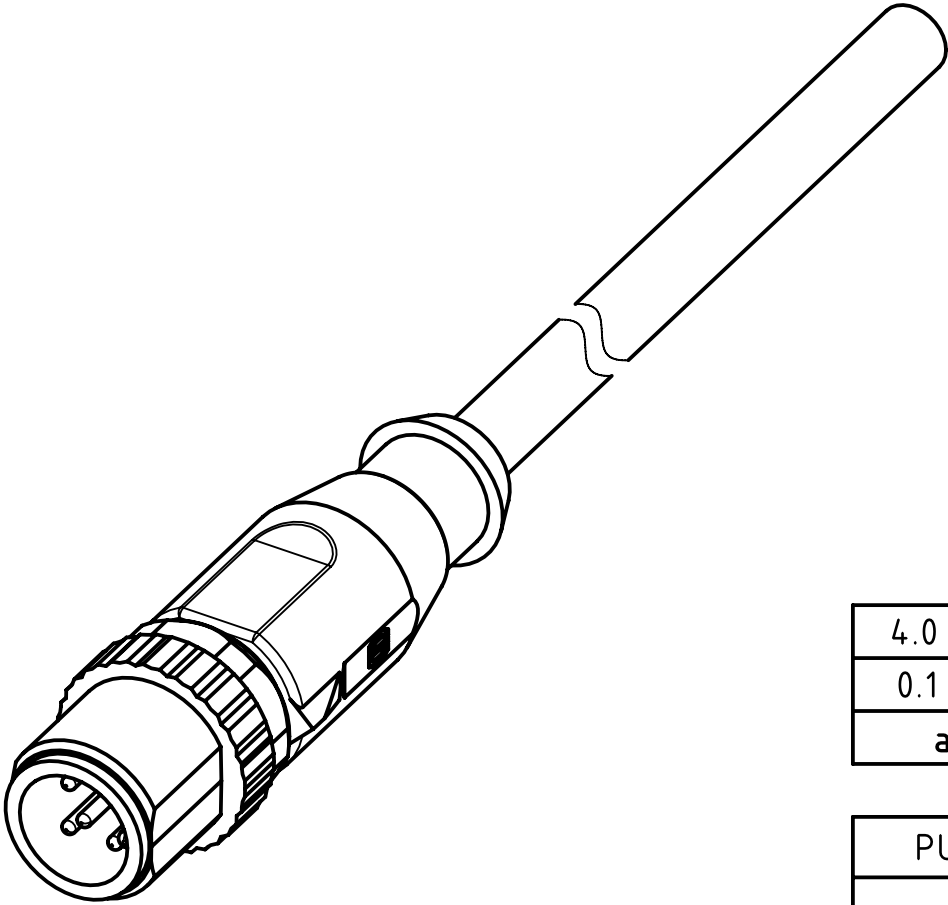

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
length in "0.1m" step	12	XXX=120
	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

4.0 to 100	±1%
0.1 to 3.9	+0.04
a [m]	Tolerance

PUR black, 5x0.34mm ²	21348400592XXX
Type of cable	Part no.

		All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
All rights reserved		Created by 407576 Stoica		Inspected by COSTEA Costea		Standardisation MUNTEANV Muntean		Date 2023-02-24	
Department HCS - RO		Title M12 Cable Assembly A-cod st/- m/-		State Final Release		Doc-Key / ECM-Nr. 100806191/UGD/009/B 500000238090		Rev. B	
HARTING Customised Solutions		Type TB		Number 21348400592XXX		Page 1/1			
D-32339 Espelkamp									