


**IDAS LED wall surface mounted luminaire, IP54**  
Article no. 65143103

Light.  
For Generations.

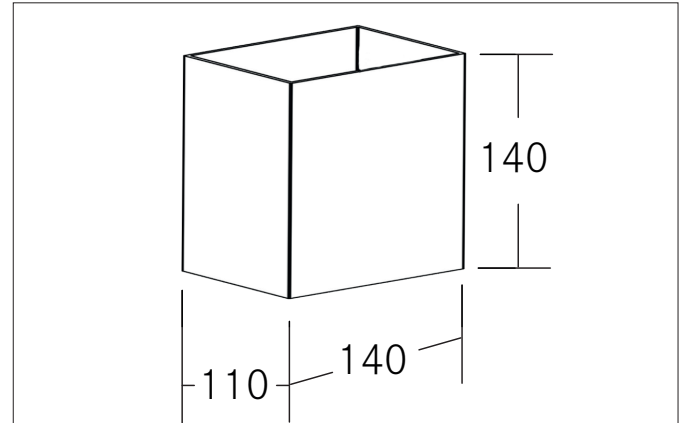

**Tender**

LED wall surface mounted luminaire, IP54, Rectangular. Ceiling cut-out Installation depth mm, Length 110 mm, Width 140 mm, Weight 0,396 kg, Luminous flux 320 lm, Power 1 x 3 W, System Efficiency 107 lm/W, Light colour warm white to warm white, Correlated color temperature (CCT) 2.950 - 3.050 K, Colour rendering index CRI > 80, Housing material: Aluminium / Glass, Colour: Graphite structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP54, .With electronic driver, on/off switchable.

| Article data      |  |
|-------------------|--|
| Article no.       | 65143103   |
| GTIN              | 4251433982685  |
| Series name       | IDAS   |
| Short description | LED wall surface mounted luminaire, IP54                       |
| Material          | Aluminium / Glass  |
| Colour            | Graphite   |
| Type of surface   | Structure  |
| Shape             | Rectangular  |
| Length            | 110 mm   |
| Width             | 140 mm   |
| Height            | 140 mm   |
| Scope of delivery | inkl. Konverter zum Anschluss an 230 V-Netzspannung, schaltbar |
| Weight            | 0.396 kg   |

**IDAS LED wall surface mounted luminaire, IP54**

Article no. 65143103

Light.  
For Generations.

| Lighting technology |                 |
|---------------------|-----------------|
| Colour temperature  | 3.000 K         |
| Light colour        | White           |
| Light output        | Direct/Indirect |
| Luminous flux       | 320 lm          |
| System efficiency   | 107 lm/W        |
| McAdam-Step         | McAdam-Step 3   |
| Colour rendering    | CRI > 80        |
| Beam angle          | 48°             |

| Operating technology of the luminaire |  |
|---------------------------------------|--|
| System output                         | 3 W  |
| Voltage type                          | AC   |
| AC nominal voltage max                | 230 V  |
| Frequenz max.                         | 50 Hz  |
| Frequenz min.                         | 50 Hz  |
| Lamp                                  | LED  |
| Protection class                      | I  |
| Degree of protection                  | IP54   |
| Control                               | on/off   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Mounting technology         |                  |
|-----------------------------|------------------|
| Mounting method             | Surface mounting |
| Place of installation       | Wall-mounted     |
| Adjustability               | Not adjustable   |
| Further references          | Outdoor          |
| Suitable for through-wiring | Yes              |

| Packing data            |   |
|-------------------------|---|
| Gross weight            | 12.5 kg   |
| Length of packaging     | 200 mm  |
| Packaging width         | 150 mm  |
| Packaging height        | 150 mm  |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.<br>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |