


BIXXL 206.30.25.2/DALI-EU

Bixxl 200 (1xLED 59W 830/3000K 5810lm 25 °)

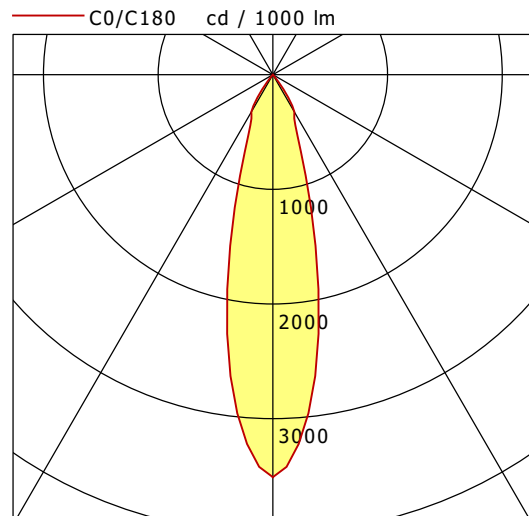

	C0	C90	C180	C270
0°	3510	3510	3510	3510
15°	1366	1366	1366	1366
30°	375	375	375	375
45°	6	6	6	6
60°	3	3	3	3
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	1.37	2266.0
6.0	2.74	566.5
9.0	4.11	251.8
12.0	5.48	141.6
15.0	6.85	90.6

η	LED
Efficiency	99 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	59 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.0
UGR C90/C270	19.0
CIE Flux Codes	99 99 100 100 100
Ra/CRI	>80