


Art. no. 565388

Recessed ceiling light Dione IP44, 8,5 W, DIM, 2700 K, white

 **DEKOLIGHT**

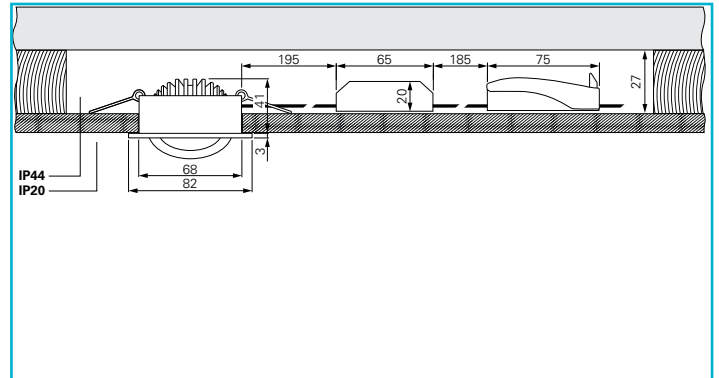

| | |
|--------------------------------------|---|
| Housing Material | Aluminium |
| Housing Color | White |
| Colour of Lens | White |
| Protection Class | Protection class II/protective insulation |
| Rated Input | 8.5 W |
| Rated Input Voltage Frequency | 220-240 V/AC 50 / 60 Hz |
| Power Supply Unit incl. | Yes |
| Connection Type | Clamp |
| Primary Connection | Connection box IP20 |
| Dimmable | Yes |
| Control technology | Leading-edge dimmer, Trailing-edge dimmer |
| Motion Detector | No |

| | |
|--------------------------------|--------------|
| Cut Out Diameter | 68 mm |
| Product weight | 163 g |
| Working Temperature | -20 to 40 °C |
| Storage Temperature | -20 to 40 °C |
| IP Protection Class | IP 20, IP 44 |
| Life Time L70 / B50 | 50000 h |
| Switching Cycles | 25000 |
| Power Consumption | 9 kWh/1000h |
| Energy Efficiency Class | E |

| | |
|---|----------------------------------|
| Light Source | LED, Light source not changeable |
| Color Temperature | 2700 K |
| Colour Consistency | 5 SDCM |
| Colour Rendering Index (Ra) | 80 |
| Rated Luminous Flux | 750 lm |
| Luminous Efficiency | 88.2 lm/W |
| Rated Angle of Reflection | 36 Degree |
| Light Distribution | Symmetric |
| Distribution Characteristic 120° | DLS |

| | |
|------------------------------|-----------|
| Swivel Angle | 30 Degree |
| Light Exit Surfaces | 1 |
| Light characteristics | Direct |
| Light direction | Below |

| | |
|------------------------------------|---------|
| Height | 41 mm |
| Diameter | 82 mm |
| Installation Depth | 41 mm |
| Required Installation Depth | 27 mm |
| Mounting Surface Thickness | 9-13 mm |