

Wall mounting socket outlet, switched - housing dimensions 460x276, with electrical interlocking PSK




| Product description | |
|-------------------------------|---|
| BALS-Prd.-Nr | 1676 |
| EAN | 4024941016766 |
| product category (PG) | TE wall mounting socket outlet, switched, interlocked |
| current (A) | 125A |
| number of poles (P99) | 5p |
| number of poles (P) | 3p+N+PE |
| position of earth contact (H) | 6 h |
| voltage (V) | 200/346 up to 240/415V |

| Product description | |
|-----------------------------|--|
| frequency (HZ) | 50 and 60Hz |
| protection degree (SA) | IP67 |
| colour code 1 (KF1) | red RAL 3000 |
| Colour of appliance | Hinged lid red RAL 3000, Bayonet ring grey RAL 7035, Housing screws grey RAL 7035, Housing bottom grey RAL 7035, Housing top grey RAL 7035 |
| connection design (AT) | screw terminal as box terminal with Kontex-contact |
| maximum conductor size (LQ) | 70.0 qmm |
| cable entry (KE) | top entry M50 bottom entry M50 0 |
| Height | 502mm |
| Width | 276mm |
| Depth | 460mm |
| dimension of enclosure (GG) | 460x276 mm (HxW) |
| material of enclosure (GM) | Polyester RAL 7035 |
| contact | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Additional technical properties | |
|---------------------------------|--|
| | Electrically interlocked with pilot contact, cable entry two at top and two at bottom (open), With DIL contactor |

| Logistics data | |
|----------------|------------------|
| Weight/pcs | 9.115 kg / Piece |
| Packaging | Carton |

| Logistics data | |
|----------------|---------------|
| Content amount | 1 ST |
| EAN | 4024941016766 |
| Length | 610 mm |
| Width | 410 mm |
| Height | 430 mm |
| Weight | 10.221 kg |
| Volume | 98,400 ccm |

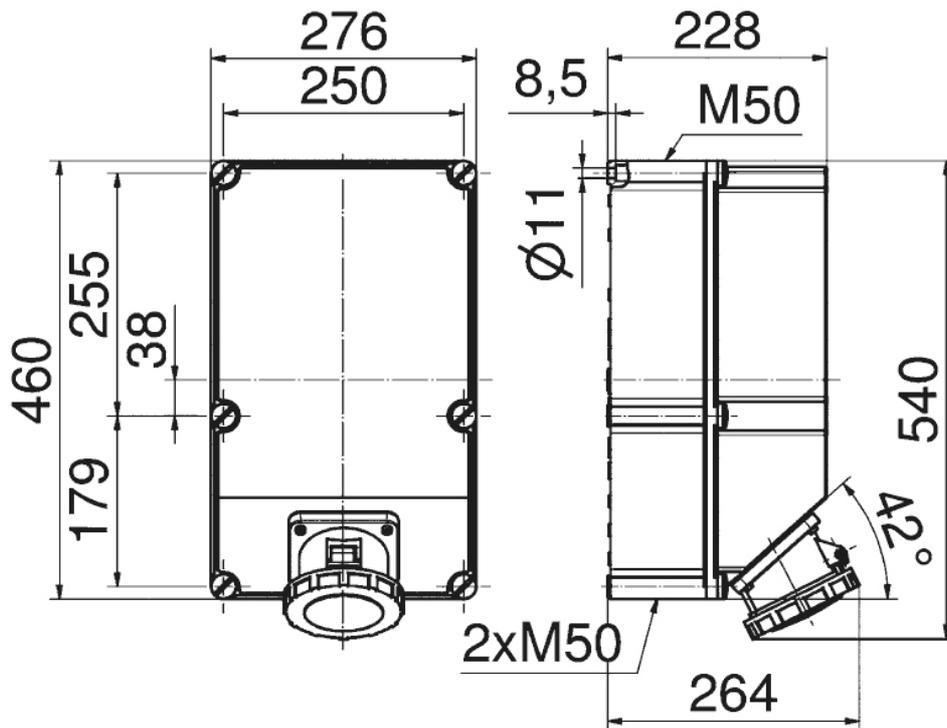

30 MB 104