



FLIR 400.3030.01

Flix 400 Round (FLIRZ 400.05, 1xLED 26W 830/3000K 2870lm 75 °)

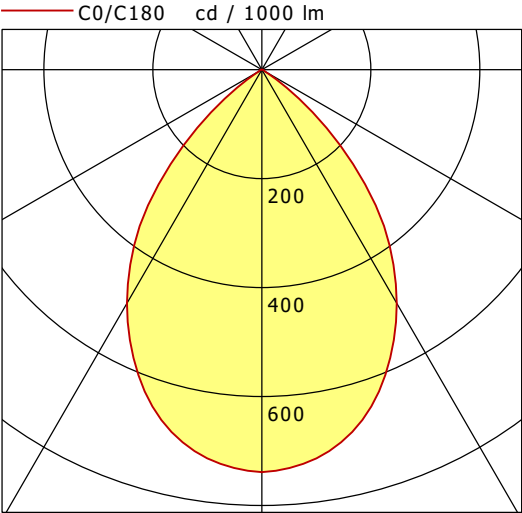

	C0	C90	C180	C270
0°	739	739	739	739
15°	678	678	678	678
30°	495	495	495	495
45°	220	220	220	220
60°	7	7	7	7
75°	4	4	4	4
90°	0	0	0	0
cd / 1000 lm				

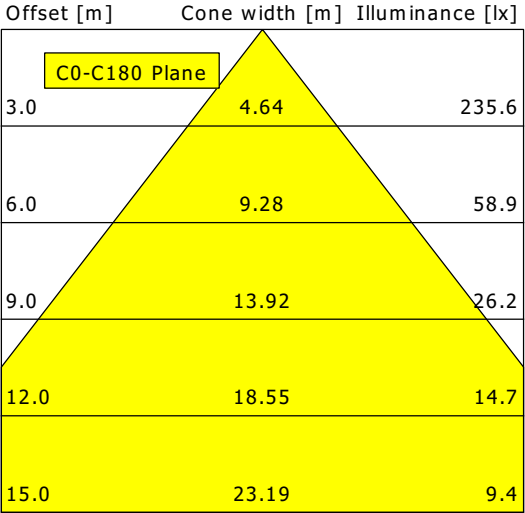

η		LED
Efficiency		110 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		26 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		20.5
UGR C90/C270		20.5
CIE Flux Codes	81 99 100 100 100	
Ra/CRI		> 80