


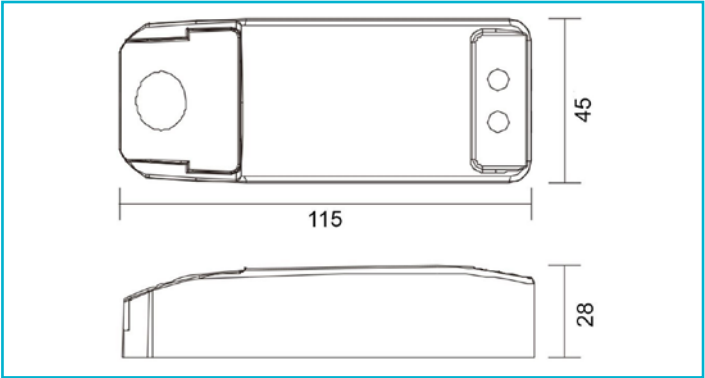

Please note:

- 0-70 W halogen lamps
- or 0-50 W/max. 6 LED lamps

- Special features
- Can be dimmed using trailing-edge phase dimmers
 - 11.5 V lamp-friendly voltage
 - Flicker-free
 - Secured against short circuits and overloads
 - Safe against overheating
 - 180515: 0-70 W halogen or 0-50 W LED/max. 6 LEDs
 - 180529: 0-105 W halogen or 0-50 W LED/max. 6 LEDs

Housing Material	Plastic
Housing Color	Black
Operating Mode	Constant voltage
Protection Class	Protection class II/protective insulation
Power	0.0-70 W
Output Voltage	11.5 V/AC
Output Current	0-6000 mA
Dimmable	Yes
Control	Trailing-edge dimmer
Number of Channels	1
Power Factor	0.99
Connection Type	Clamp
Number of Circuit Breaker B10A max.	8
Number of Circuit Breaker B16A max.	14
Number of Circuit Breaker C10A max.	18
Number of Circuit Breaker C16A max.	29
Inrush Current max.	20 A / 300 µs
Capacitive Load	97.79 nF
Reference Point Tc	80 °C
IP Protection Class	IP 20
Length	115 mm
Width	45 mm
Height	28 mm
Product weight	109 g

