


BIXXL 205.30.60.2

BixxL 200 (1xLED 51W 830/3000K 5240lm 60 °)

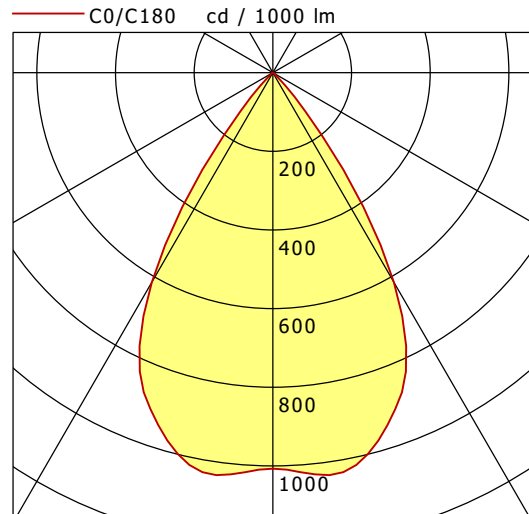

	C0	C90	C180	C270
0°	1007	1007	1007	1007
15°	987	987	987	987
30°	615	615	615	615
45°	32	32	32	32
60°	4	4	4	4
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	3.75	586.4
6.0	7.50	146.6
9.0	11.24	65.2
12.0	14.99	36.6
15.0	18.74	23.5

C0-C180 Plane

η	LED
Efficiency	103 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	51 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.5
UGR C90/C270	22.5
CIE Flux Codes	97 99 100 100 100
Ra/CRI	>80