

Han 3A-C/P-f.Hood-DL-seal-grey-w.cord

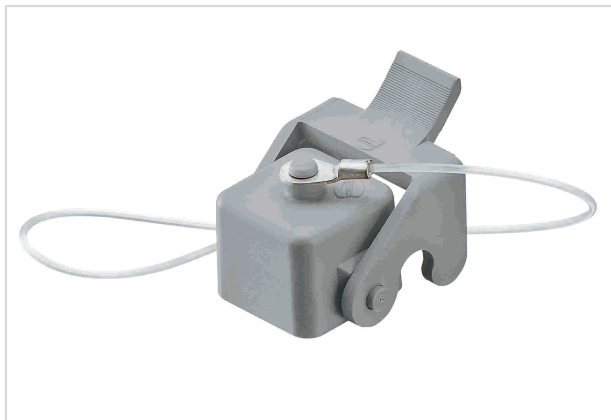


Image is for illustration purposes only. Please refer to product description.

Part number	09 20 003 5441
Specification	Han 3A-C/P-f.Hood-DL-seal-grey-w.cord
HARTING eCatalogue	https://b2b.harting.com/09200035441

Identification

Category	Accessories
Series of hoods/housings	Han A [®]
Type of hood/housing	Protection cover
Description of hood/housing	for hoods
	Thermoplastic
	With fixing cord
	With seal

Version

Size	3 A
Locking type	Single locking lever
Details	for mounted female insert or for mounted Han-Brid [®] insert

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP44
	IP65 / IP67 with seal screw 09 20 000 9918
Type rating acc. to UL 50 / UL 50E	4
	4X
	12

Material properties

Material (hood/housing)	Polycarbonate (PC)
Colour (hood/housing)	RAL 7032 (pebble grey)
Material (seal)	NBR



Pushing Performance
Since 1945

Material properties

Material (locking)	Polyamide (PA)
Colour (locking)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Yes
REACH SVHC substances	6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead Nickel Naphthalene
Fire protection on railway vehicles	EN 45545-2 (2020-08)
Requirement set with Hazard Levels	R22 (HL 1-3) R23 (HL 1-3)

Specifications and approvals

Approvals	DNV GL
-----------	--------

Commercial data

Packaging size	10
Net weight	10.36 g
Country of origin	Romania
European customs tariff number	85389099
GTIN	5713140038974
eCl@ss	27440208 Cap for industrial connectors