


# BIXXL 206.40.40.2

Bixxl 200 (1xLED 59W 840/4000K 5920lm 40 °)

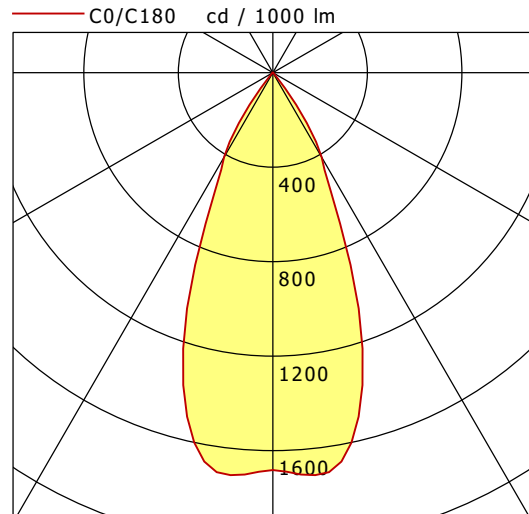

	C0	C90	C180	C270
0°	1682	1682	1682	1682
15°	1441	1441	1441	1441
30°	413	413	413	413
45°	6	6	6	6
60°	3	3	3	3
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
<b>C0-C180 Plane</b>		
3.0	2.45	1106.6
6.0	4.91	276.6
9.0	7.36	123.0
12.0	9.82	69.2
15.0	12.27	44.3

<b>η</b>	LED
Efficiency	100 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	59 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.8
UGR C90/C270	19.8
CIE Flux Codes	99 99 100 100 100
Ra/CRI	>80