


# LK-CH 045.122.840.50.2/DALI


Lichtkanal 045 | Light-Insert | Choc (1xLED 21W 840/4000K 2290lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

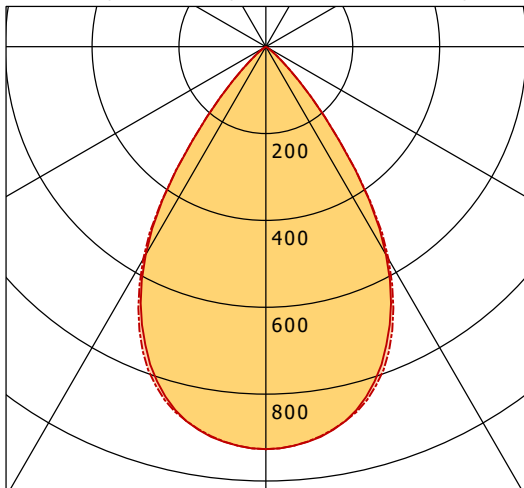

	C0	C90	C180	C270
0°	927	927	927	927
15°	851	857	851	857
30°	553	565	553	565
45°	92	91	92	91
60°	1	1	1	1
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

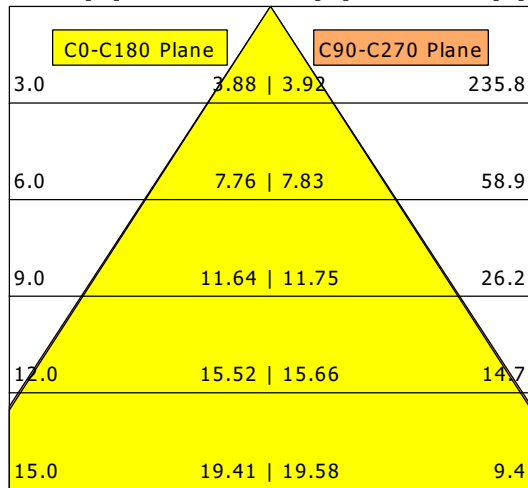

<b>η</b>	LED
Efficiency	109 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	21 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.9
UGR C90/C270	18.9
CIE Flux Codes	90 100 100 100 100
Ra/CRI	> 80