
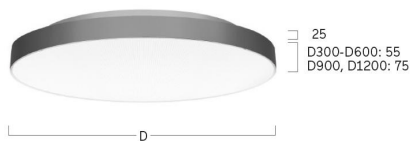


Basic-X1

Surface mounted luminaire - Direct/indirect light distribution

Article code: BX1ASE-840M-D500



Customer / Project: _____

Note: _____

| | |
|------------------------------|------------------------------------|
| Productname | Basic-X1 |
| Lamp | LED |
| Installation Type | Surface mounted luminaire |
| Surface finish | Radiant Silver |
| Light characteristics | Direct/indirect light distribution |
| Colour temperature | 4000K |
| Colour Rendering Index (CRI) | CRI>80 |
| Optical system | Microprismatic screen |
| Control | Switchable |
| Length L/Diameter D (mm) | D=500mm |
| Height H (mm) | H=55+25mm |
| Current/Power | Medium-Power |
| Luminous Flux | 7760lm |
| Power consumption | 51W |
| Degree of protection | IP20 |
| Certification | Prüfzeichen: ENEC |
| LED lifetime | L85B10 (tq 25°C) = 50.000h |
| UGR | UGR<=19 |
| Photometric code | 8 40 / 3 3 9 |
| Photobiological class | RG0 (EN62471) |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 5,4kg |

