
CARDUI LED wall recessed light, IP65


Article no. 60208183



BRUMBERG

Light. For Generations.

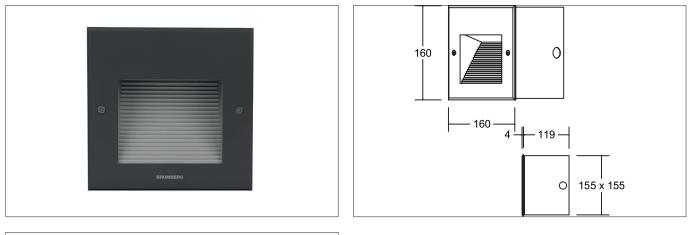



₩ / ~ ~ (1) 100lm 62° 230V LDT-Data IP65

Tender

LED wall recessed light, IP65, Rectangular. Ceiling cut-out L x W 155 x 155 mm, Installation depth 119 mm, Weight 0,770 kg, with rotattionssymmetrical, deep, wide distributed light intensity. Luminous flux 100 lm, Power 1 x 2 W Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Plastic, Colour: Black, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP65. With electronic driver, on/off switchable.

Article data	
Article no.	60208183
GTIN	4250047781554
Series name	CARDUI
Short description	LED wall recessed light, IP65
Material	Aluminium / Plastic
Colour	Black
Shape	Rectangular
Built-in width	155 mm
Built-in length	155 mm
Installation depth	119 mm
Width	160 mm
Hight	160 mm
Scope of delivery	Incl. converter for connection to the 230-V mains voltage, on/off and wall mounting housing
Weight	0.770 kg

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 03.05.2023 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

CARDUI LED wall recessed light, IP65

Article no. 60208183

Light. For Generations.

BRUMBERG

Lighting technology Colour temperature 3.000 K White Light colour Light output Direct Luminous flux 100 lm Colour rendering CRI > 80 Reflector Matt Beam angle 62° Light sharing Symmetric

Operating technology of the luminaire	
System output	2 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Protection class	
Degree of protection	IP65
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable

Packing data	
Gross weight	2.02 kg
Length of packaging	190 mm
Packaging width	180 mm
Packaging hight	150 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.