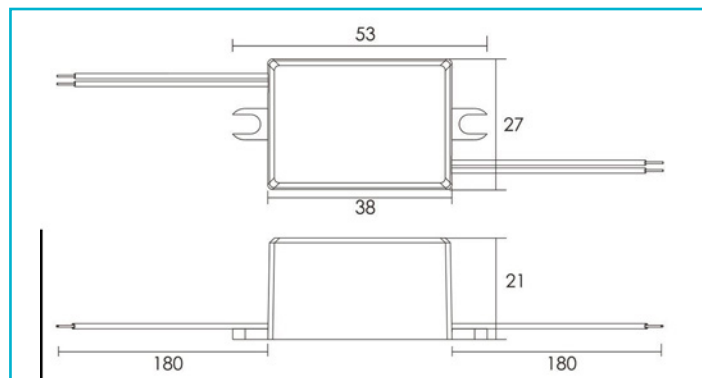


**Special features**

- Flicker-free
- Secured against short circuits and overloads
- Overheating protection

Housing Material	Plastic
Housing Color	Black
Functions	Short-circuit proof, Lamp control gear 110, Furniture installation, Protective extra-low voltage, Overloading protection, Overtemperature protection

Operating Mode	Constant current
Protection Class	Protection class II/protective insulation
Power	0.9-3.9 W
Output Voltage	2.5-11 V/DC
Output Current	350 mA
Power Factor	0.5
Connection Type	Open cables
Primary Connection	With free strand / conductor ends
Secondary Connection	Open cables

Number of Circuit Breaker B10A max.	70
Number of Circuit Breaker B16A max.	112
Number of Circuit Breaker C10A max.	140
Number of Circuit Breaker C16A max.	224
Inrush Current max.	10 A / 100 μs
Reference Point Tc	80 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 65

Switching Cycles	100000
Life Time	50000 h

Length	53 mm
Width	27 mm
Height	21 mm
Product weight	46 g

