





AKIMISKI LED bollard light, IP65, height 800 mm, on/off switchable

Article no. 65149103

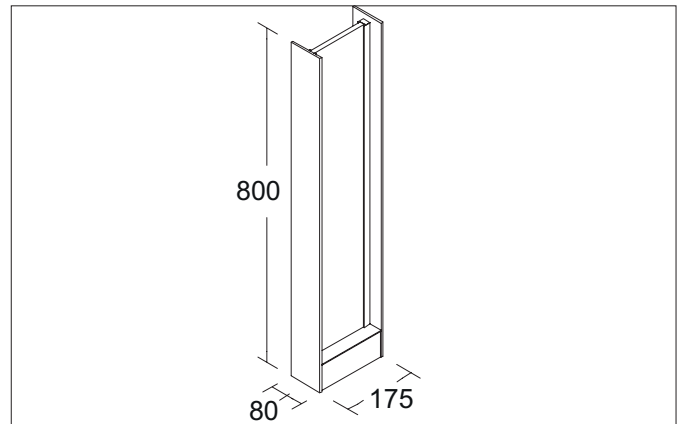

Tender

LED bollard light, IP65, height 800 mm, on/off switchable, Angular. Luminaire length 80.0 mm, Luminaire width 175.0 mm, Height 800.0 mm Weight 6.1 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover glass opal Luminous flux 450 lm, Power 1 x 20 W, Light colour warm white, Correlated color temperature (CCT) 2.700 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Steel / Glass, Colour: anthracite, Permissible ambient temperature (ta): -20 °C up to +45 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP65, shock resistance according to IEC62262: IK04 .With electronic driver, on/off switchable.


AKIMISKI LED bollard light, IP65, height 800 mm, on/off switchable

Article no. 65149103

Article data	
Article no.	65149103
GTIN	4255752529125
Series name	AKIMISKI
Short description	LED bollard light, IP65, height 800 mm, on/off switchable
Material	Steel / Glass
Colour	anthracite
RAL colour	7016
Type of surface	Structure
Shape	Angular
Length	80 mm
Width	175 mm
Height	800 mm
Scope of delivery	inkl. Konverter zum Anschluss an 230 V-Netzspannung
Weight	6.1 kg
D licence plate	No
Seawater-resistant	Yes
Conformance	CE, UKCA

Lighting technology	
Colour temperature	2.700 K
Light colour	white
Light output	Direct
Luminous flux	450 lm
System efficiency	22 lm/W
McAdam-Step	McAdam-Step 6
Colour rendering	CRI > 80
Luminaire optics	Without
Reflector	Without
Beam angle	110°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	20 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	60 Hz
Frequency min	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP65
Ambient temperature	-20°C up to +45°C
Dimmable	No
Wire number	3
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Energy efficiency class	not required
max. no. lights on B16 A	16
max. no. lights on C10 A	22
max. no. lights on C16 A	31


AKIMISKI LED bollard light, IP65, height 800 mm, on/off switchable

Article no. 65149103

Mounting technology	
Mounting method	Surface mounting
Place of installation	Floor-mounted
Adjustability	Not adjustable
Impact resistance	IK04
Further references	Outdoor
Cover	Glass opal
Suitable for through-wiring	No

Packing data	
Gross weight	7.184 kg
Length of packaging	285 mm
Packaging width	190 mm
Packaging height	920 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.