


## SCHUKO Socket USB Alu

### Product Data Sheet

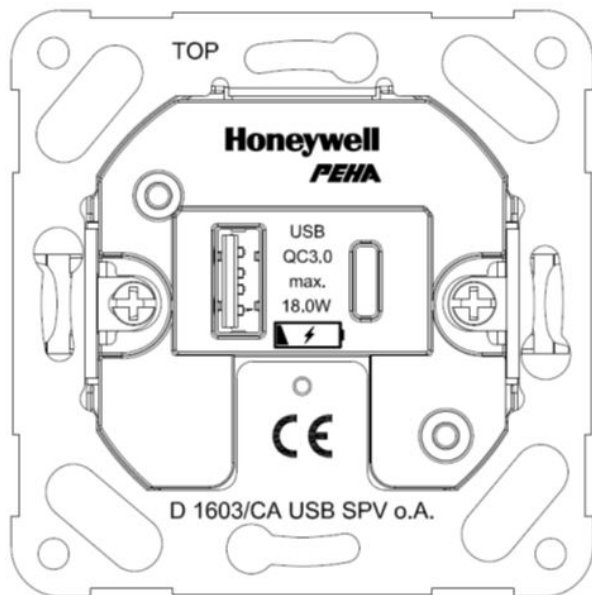

|                   |                         |
|-------------------|-------------------------|
| Halogen free      | Yes                     |
| Transparent       | No                      |
| Model             | Other                   |
| Mounting method   | Flush mounted (plaster) |
| Material          | Plastic                 |
| Colour            | Aluminium               |
| Type of fastening | Mounting with screw     |
| MP3               | no                      |
| radio link        | no                      |
| [CC00001_2]       | 70Millimetre            |
| [CC00001_3]       | 70Millimetre            |
| [CC00180_2]       | 30Millimetre            |

**SCHUKO Socket USB**  
**Alu**

SCHUKO socket with USB charger 3.4A, USB type A + C (QC3.0) 2-pole, 16A 250 V ~, with connection terminals according to VDE 0620, with central plate for combinations, with 2 USB ports type A and type C for supplying and charging mobile devices. Technical specifications  
Nominal voltage: AC 220... 250 V ~ Mains frequency: 50/60 Hz Rated current socket: 16 A. Output current USB (total): 3.4 A USB type A operation (without USB type C): USB output voltage DC 5V, charging current max.3A (max.15W) USB type C (QC3.0) operation (without USB type A): USB output voltage DC 9V, charging current max.2A (max.18W) USB output voltage DC 12V, charging current max.1.5A (max.18W) USB type A + C (parallel operation): USB output voltage DC 12V, charging current max.3.4A (max.17W) with charge current monitoring Connection type: plug-in terminal Single wire: 1.5... 2.5 mm<sup>2</sup> Use of deep flush-mounted boxes recommended

| Material No. | Article No.            | EAN-code      |
|--------------|------------------------|---------------|
| 00318212     | D 11.6511.70 SI USB CA | 4010105318210 |

---

**PEHA Elektro GmbH & Co.KG**

a Honeywell Company  
Daimlerstraße 4  
58553 HALVER  
DEUTSCHLAND

Tel.: 02353 9118 001  
Fax: 02353 9118 311  
mail: [peha@honeywell.com](mailto:peha@honeywell.com)  
[www.peha.de](http://www.peha.de)

Änderungen vorbehalten. © Honeywell PEHA