


Art. no. 862280

Power supply unit (CV, DC) dimmable Long-Flat, DIM,  
CV, 24 V 50-150 W



<b>Housing Material</b>	Plastic
<b>Housing Color</b>	Black
<b>Operating Mode</b>	Constant voltage
<b>Protection Class</b>	Protection class II/protective insulation
<b>Power</b>	80.0-240 W
<b>Output Voltage</b>	24 V/DC
<b>Output Current</b>	3300-10000 mA
<b>Dimmable</b>	Yes
<b>Control</b>	Leading-edge dimmer, Trailing-edge dimmer
<b>Number of Channels</b>	1
<b>Power Factor</b>	0.95
<b>Connection Type</b>	Clamp
<b>Number of Circuit Breaker B10A max.</b>	2
<b>Number of Circuit Breaker B16A max.</b>	3
<b>Number of Circuit Breaker C10A max.</b>	4
<b>Number of Circuit Breaker C16A max.</b>	6
<b>Inrush Current max.</b>	65 A / 500 $\mu$ s
<b>Reference Point Tc</b>	90 °C
<b>Working Temperature</b>	-20 to 45 °C
<b>Storage Temperature</b>	-20 to 70 °C
<b>IP Protection Class</b>	IP 20
<b>Switching Cycles</b>	100000
<b>Life Time</b>	50000
<b>Length</b>	443 mm
<b>Width</b>	32 mm
<b>Height</b>	23 mm
<b>Product weight</b>	500 g

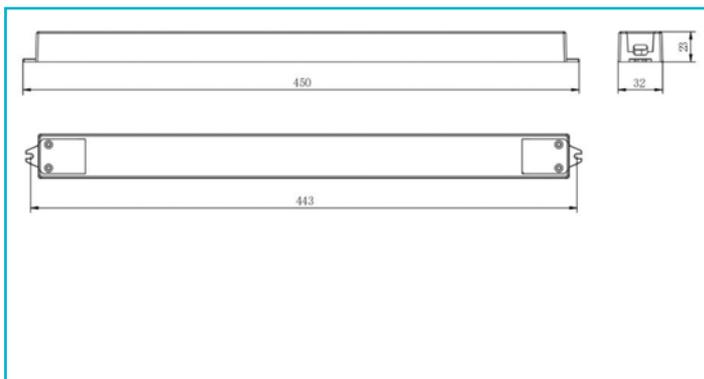