

## Ringo Star-GX

Pendant luminaire - Direct light distribution

Article code: RGXLBL-840H-D900-KB



Illustrations may only be similar and serve as an orientation.

Ringo Star-GX. LED. Pendant luminaire. Luminaire body made of aluminium profile with 40mm profile width. Surface finish Jet Black. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre for wide and symmetrical light distribution. High glare limitation, compatible for office applications. UGR<=19. Reflector: Jet Black. Dimmable DALI. DxHxW (round). D=900mm. W=40mm. H=65mm. Cord suspension for parallel installation with power supply cable and ceiling rose (Set).



Pendant length max 4000mm. Power supply: transparent. Ceiling rose: Matching luminaire's surface colour. High-power current. 8190lm. 66W. 6,8kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

# lightnet

## Ringo Star-GX

Pendant luminaire - Direct light distribution

Article code: RGXLBL-840H-D900-KB

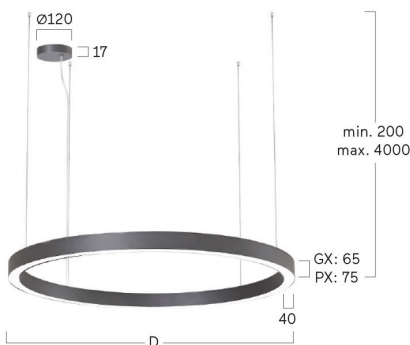

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Ringo Star-GX
Lamp	LED
Installation Type	Pendant luminaire
Surface finish	Jet Black
Light characteristics	Direct light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Lens Louvre
Reflector Colour Inside	Reflector: Jet Black
Control	Dimmable (DALI)
Length L/Diameter D (mm)	D=900mm
Width W (mm)	W=40mm
Height H (mm)	H=65mm
Current/Power	High-Power
Luminous Flux	8190lm
Power consumption	66W
Suspension	Parallel susp. (Set)
Ceiling rose colour	Ceiling rose: Matching luminaire`s surface colour
Pendant length (mm)	Pendant length max 4000mm
Degree of protection	IP20
Cable Colour	Power supply: transparent
LED lifetime	L80B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	6,8kg

