

preLink M12 plug-in module 4-pole Cat.5

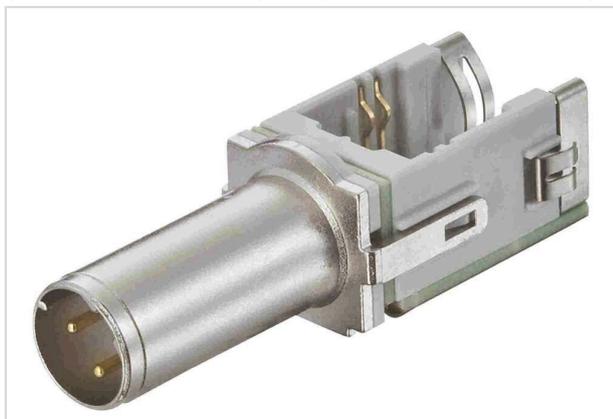


Image is for illustration purposes only. Please refer to product description.

Part number	20 82 005 1214
Specification	preLink M12 plug-in module 4-pole Cat.5
HARTING eCatalogue	https://harting.com/20820051214

Identification

Category	Connectors
Series	preLink® Circular connectors M12
Element	Connector insert
Specification	Straight

Version

Termination method	preLink® IDC insulation displacement termination
Gender	Male
Shielding	Shielded
Number of contacts	4
Coding	D-coding
Details	Please order termination block separately Please order screw mounted housing separately.
Details	For Fast Ethernet applications only
Details	This item requires additional a termination block. Please select these under "Matching Products".

Technical characteristics

Conductor cross-section	0.1 ... 0.12 mm ² 0.22 ... 0.32 mm ²
Conductor cross-section [AWG]	AWG 27 ... AWG 26 AWG 24 ... AWG 22
Transmission characteristics	Cat. 5 Class D up to 100 MHz



Pushing Performance
Since 1945

Technical characteristics

Data rate	10 Mbit/s 100 Mbit/s
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65 IP67
Cable diameter	5 ... 9.5 mm
Vibration resistance	5.72 m/s ² acc. to IEC 61373 Category 1 Class B
Shock resistance	5 g / 30 ms, 5 shocks / axis and direction acc. to IEC 61373 Category 1 Class B

Material properties

Material (insert)	Zinc die-cast, nickel-plated
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Yes
REACH SVHC substances	Lead
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead

Specifications and approvals

Specifications	EN 45545-2
UL / CSA	UL 1863 DUXR2.E470046 CSA-C22.2 No. 182.4, No. 233-09 DUXR8.E470046
Approvals	DNV GL
PROFINET	Yes

Commercial data

Packaging size	1
Net weight	10 g
Country of origin	Latvia
European customs tariff number	85366990



Pushing Performance
Since 1945

Commercial data

GTIN	5713140135604
eCl@ss	27440223 Contact insert for circular connectors
ETIM	EC003557
UNSPSC 24.0	39121421